


## Technical specifications

### MAIN CHARACTERISTICS

- Cost-effective complement to conventional construction hoists
- Comfortable ride with Alimak's newly developed soft stater (AliSoft) technology
- Various entrance possibilities at ground level and at any landing level
- Compact and lightweight design with low environmental impacts
- Easily transportable unit
- Easy to install with erection crane or forklift using optional lifting device or forklift pockets
- Compatible with Alimak TPL transport platform height components and Alimak Scando landing equipment
- Digitally connected and accessible via My Alimak portal
- Robust and durable design, made for tough working conditions
- Fully compliant with EN 12159

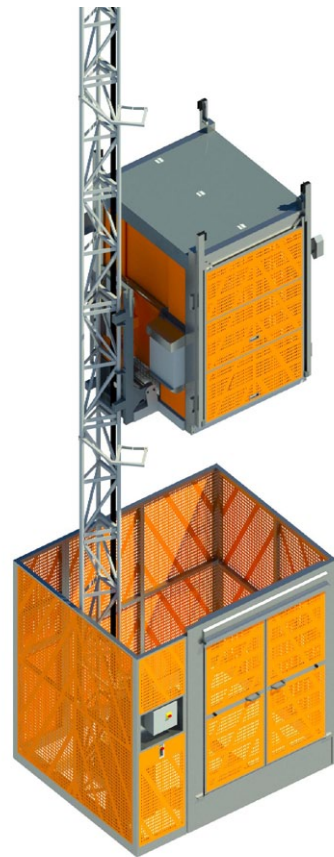

### ALIMAK MEDIUS 350 10-15

Motor control	Direct on line (DOL) with Alimak Soft Starter (AliSoft)
Payload capacity, max.	1,000 kg or 11 passengers
Travelling speed, max.	24 m/min.
Lifting height, max.	100 m
Car size, internal (W x L x H)	1.4 m x 1.5 m x 2.2 m
Max. load space	4.62 m <sup>3</sup>
No. of motors	1 x 7.6 kW
Safety device type	Alimak
Power supply range	400 V, 50 Hz, 3 phase
Fuse ratings	32 A
Type of mast	350 x 350, tubular steel with integrated rack
Length mast section	1.508 m
Weight mast section with 1 rack	54 kg
Transport dimensions (base unit)	2.58 m x 1.96 m x 2.73 m

For other demands or specifications, please consult your Alimak representative.