


Technical specifications

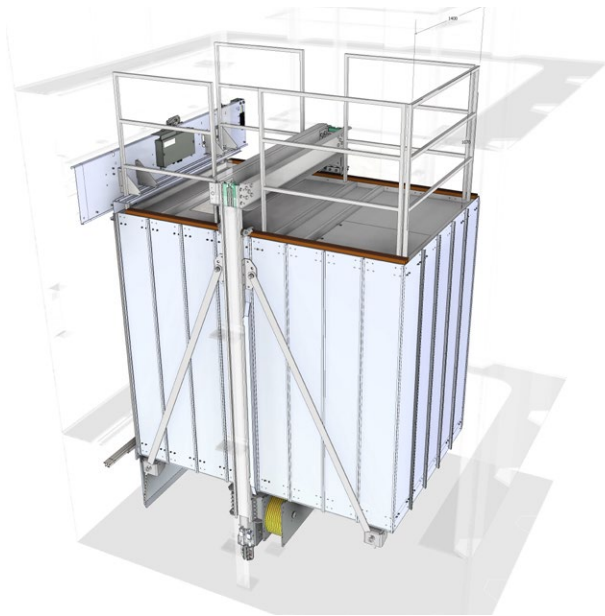

TRUSTED EXPERTISE IN MARINE AND OFFSHORE ELEVATORS

Since its inception over 75 years ago, Alimak has led the elevator industry with innovative solutions tailored for the most demanding environments. With a legacy of more than 23,000 elevators installed globally across onshore and offshore locations, Alimak continues to drive advancements that enhance safety, efficiency, and sustainability in the marine industry.

Payload capacity	2,000 kg
Travelling speed	0.6 m/s
Lifting height	Up to 35 m
Motor control	Frequency control (VFD)
Internal car width	1.6 m
Internal car length	2.4 m
Internal car height	2.1 m
Shaft size	3.0 x 3.0 m
Door opening (W x H)	0.9-1.0 m x 2.0-2.1 m
Power supply range	400 V, 50 or 60 Hz, 3 phase
Regulations	DNV-ST-0495
Protection class	Safe area, suitable for indoor use (+5 to +40°C)
Operational accelerations	Roll, pitch & heave up to: +/- 0,35g
Design lifetime	20 years